

Mild Steel			Stainless Steel			Aluminium		
Recommended	Maximum	Severance mm	Recommended	Maximum	Severance mm	Recommended	Maximum	Severance mm
20 mm.	25 mm.	30 mm.	15 mm.	18 mm.	20 mm.	17 mm.	20 mm.	25 mm.



P-Tronic 70



PT 80 6 METERS QUICK CONNECTOR TORCH INCLUDED

P-TRONIC 70

Code V0082AA

MAIN FEATURES:

- no HF arc ignition system with double solenoid-valve
- back striking arc system (patent pending)
- parts with improved lifetime, concentrated plasma stream and better cooling
- quality cutting and excellent travel speed
- cut selector: standard cutting, gouging, grating torch configuration:

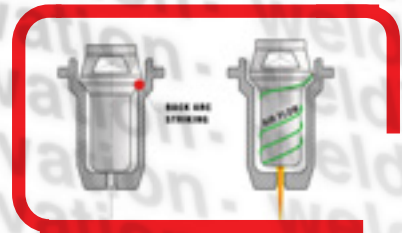

cutting
Stand off



gouging



grating

- central adaptor torch fitting

TECHNICAL DATA

Three Phase	Fuse	ED	Input Power	Max no load voltage	Current range	Protection Class	Dimension	Weight
400V	T16A	60%	12KVA	280V	20 ÷ 70	IP21S	340X520X380	25Kg

OPTIONAL / ACCESSORIES



CODE Z0133AA **PLASMA TORCH DESCRIPTION**
PLASMA TORCH PT80 CENTRAL ADAPTOR

INCLUDED



CODE Z0134AA **COMPASS DESCRIPTION**
COMPASS PT80



CODE Z0229AA **CLAMP/HOLDER DESCRIPTION**
EARTH CLAMP CABLE 16MMQ 3M PLUG25